



600 Clear Sealer 610 Matte Clear Sealer



DESCRIPTION:

- 100 percent acrylic transparent coating
- Contains EPA-registered mildewcide and algicide
- Dirt resistant
- The coating hardens and does not soften under solar heating. The non-tacky surface provides high resistance to accumulation of dirt and pollutants.
- Water vapor permeable


USES:

- Protects finishes from harmful UV light
- Well-suited for use with darker colors to increase fade resistance
- Aids finishes in resisting chalking
- A protective exterior acrylic-based coating. Compatible with Parex DPR finishes. May be applied over them
- As a protective coating for Cerastone®, Spraystone, and Tuffstone Granite
- 610 Matte Clear Sealer for application requiring reduced gloss
- Masonry Sealer

COMPOSITION:

- Binder base: 100 percent Acrylic
- Water based: VOC compliant
- Solids:
 - By weight: 20 percent
 - By volume: 19 percent
- Appearance: Clear-slight gloss may be apparent on smoother surfaces

100% Acrylic

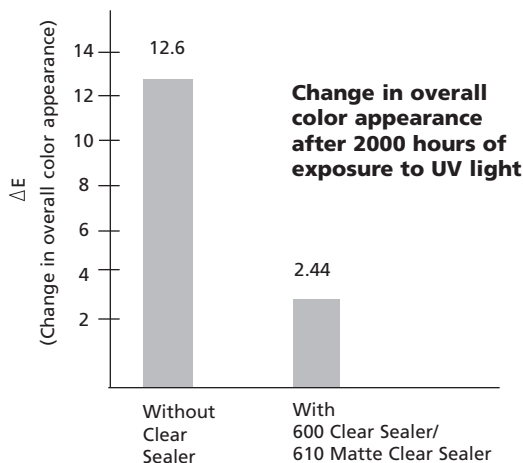

Finishes coated with 600 Clear Sealer/610 Matte Clear Sealer show far less change in overall color than finishes without 600 Clear Sealer/610 Matte Clear Sealer after 2000 hours of intense laboratory UV exposure. 600 Clear Sealer/610 Matte Clear Sealer keeps finishes looking fresher.

600 Clear Sealer 610 Matte Clear Sealer

COVERAGE:

Depending on the condition of the substrate and method of applications, approximate coverage is:

One coat: 160-200 sq. ft./gallon,
(15-18.5 m²)

CONTAINER:

5 gal. (19 L) pail

- Storage: Protect from sun and freezing at all times
- Shelf Life: One year if protected from sun and freezing

DRYING TIME:

Approximately 1-4 hours depending upon temperature, humidity and substrate. Can be recoated after 8 hours, except under very humid conditions. Under very humid conditions, wait 24 hours at a minimum, and wait longer, if necessary, for the first coat to dry completely clear before applying the second coat.

CLEANUP:

Water soluble prior to drying. Clean tools and containers with water prior to drying.

SURFACE PREPARATION:

- Remove surface contaminants such as dust or dirt without damaging the substrate.
- For additional options, contact ParexLahabra Technical Services Department.

MIXING:

- Use clean equipment for mixing and preparation.
- Stir Parex 600 Clear Sealer/610 Matte Clear Sealer to a uniform consistency.
- Avoid creating air bubbles or foam.

APPLICATION:

- Read the entire label before using this product.
- Parex 600 Clear Sealer/610 Matte Clear Sealer exhibits good surface coverage in single applications. However, two coats of 600 Clear Sealer/610 Matte Clear Sealer may be required to obtain adequate coverage of the surface. A second coat can be applied after the first has dried.
- Parex 600 Clear Sealer/610 Matte Clear Sealer is easily applied with roller or suitable spray equipment. Apply Parex 600 Clear Sealer as packaged. If necessary, add a small amount of clean potable water: maximum 1.6 fluid oz. (50 ml) per gallon or 8 fluid oz. (250 ml) per 5 gallon pail.

LIMITATIONS:

- Ambient and surface temperatures must be 40°F (4°C) or higher during application and drying time. Provide supplemental heat and protection from precipitation as needed.
- Use only on surfaces that are sound, clean, dry, and free from any residue which may affect the ability of the 600 Clear Sealer/610 Matte Clear Sealer to bond to the surface.
- The dried sealer may become milky in color after it gets wet. This is from a chemical reaction in the curing process. This should only occur once or twice when rewet after which the sealer will retain its transparent appearance.

